

# CT157

## WIRELESS WALL MOUNTED SWITCH Instant Audio/Visual Alerts

*Simple Operation, User-Programmable Alerts, Easy Installation*

The CT157 Pull Down Panic Button is a compact, wall-mounted, wireless transmitter that can initiate audio/visual emergency alerts, activate pre-programmed voice messages through wireless PA speakers, or send a detailed text message to wireless LED message boards.

The CT157 is designed to function as a standalone device or as part of a Visiplex's paging base station. When used in a standalone configuration, the CT157 can directly initiate audio/visual emergency alerts, activate pre-programmed voice messages through wireless PA speakers, or send a detailed text message to wireless LED message boards. When operating as part of a paging base station, the CT157 can, in addition to the above, send SMS text message to staff member cell phone and provide full supervision capabilities to ensure reliable operation at all times.

Equipped with a built-in, long lasting Lithium battery, the CT157 will provide years of maintenance-free operation, while offering wireless functionality supervision.



## CT157 KEY FEATURES



**AUDIO ALERTS**  
Activate PA Messages



**VISUAL ALERTS**  
Control Beacon Lights and  
LED Message Boards



**ALERTS ANYWHERE**  
Detailed Phone or Pager  
Text Alerts



**LONG RANGE**  
Up to 300' Range



**FULLY SUPERVISED**  
Periodic Status Alerts to  
Monitoring Base Station



**LOW MAINTENANCE**  
Long-Life Lithium Battery



VISIPILEX


1287 BARCLAY BLVD  
BUFFALO GROVE, IL 60089

PHONE: 877-918-7243

FAX: 847-229-0259

EMAIL: [INFO@VISIPILEX.COM](mailto:INFO@VISIPILEX.COM)

WEB: [WWW.VISIPILEX.COM](http://WWW.VISIPILEX.COM)

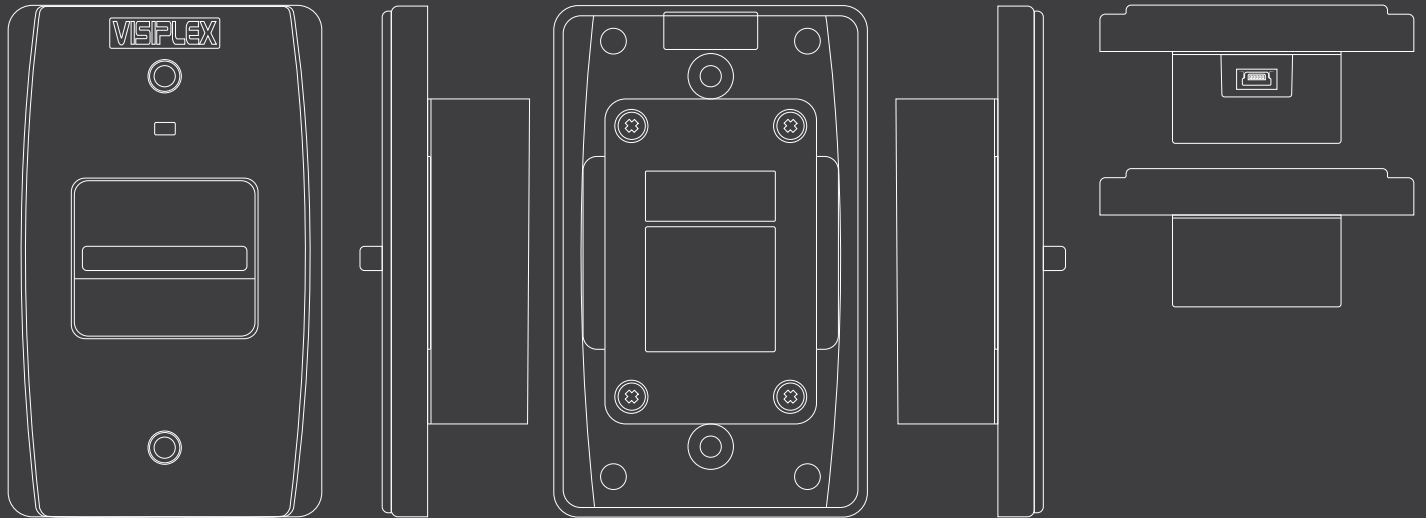

## CT157 SPECIFICATIONS

Parameter	Description
Color	Off-white body, Red Switch (Standard), Amber Switch, Blue Switch, Green Switch, Black Switch (Optional)
Frequency Band	UHF 402-470 MHz
Range	300'
Dimensions	2.75" x 4.5" x 1.6", 70mm x 114mm x 41mm (W x H x D)
Weight	3.5oz, 100g
Power	Single CR2 3V Lithium battery
Operating Conditions	Temperature 10°-130°, Humidity 0-90% non-condensing
RF Power	10 mW
Programming	PC Based programming
Mounting Options	In-wall or surface mounting, fits one-gang electrical box
Signalling Time	2-4 Seconds
Stability	Better than 5 PPM
Paging Format	POCSAG, 512, 1200 or 2400 BPS
Channel Spacing	12.5 KHz - Narrow Band
Activation Codes	Call, Cancel & Low Battery
Options	WPA-1003 (Deep Electrical Box), WPA-1015 (Safety Cover), WPA-1025 (Programming Cable)
Warranty	One Year Limited Warranty



**VISIPLEX**

1287 BARCLAY BLVD  
BUFFALO GROVE, IL 60089

**PHONE:** 877-918-7243

**FAX:** 847-229-0259

**EMAIL:** INFO@VISIPLEX.COM

**WEB:** WWW.VISIPLEX.COM